


- Bezel-Free True Flat PCAP touch
- MSR / I-Button / Finger print optional
- VFD customer display / 9.7" True-Flat LED monitor optional
- Mounted / Desktop type optional
- Slim stand
- Multiple interfaces
- Easy disassemble

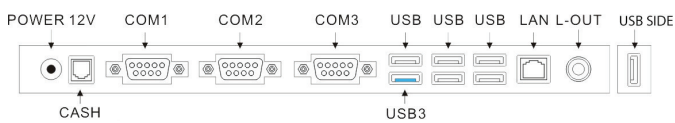

Specification

CPU	Intel®Celeron® Bay Trail D J1900 Quad Core 2.0G up to 2.42G,2M Cache 10W(Fanless)
Memory	4GB DDR3 1333MHZ1* SO-DIMM slot
HDD	MSATA 64GB SSD+slot SATA 2.5"
Size / Resolution	15" TFT-LED/ 1024×768
Touch Screen	True flat PCAP touch screen
Windows / Linux	Windows 7 / 10
Card Reader	MSR / I-button/ Finger print
Customer Display	VFD (2*20 lines)
2nd Display	9.7"true-flat LED monitor
Wireless Module	802.11a/b/g/n
I/O Interface	Rj45x1,USB2.0x6,USB3.0x1,RS232x3,Rj11x1
Certificates	CE,FCC Class A,RoHS,CB
Working Temperature	0°C~40°C(32°F~104°F)
Carton Size(mm)	slim stand 425*185*420 (L*W*H)
G.W	6.5KGS